



## TigerBrite Display – 64x37




**Preparation:** The drop cloth and cotton gloves (in your graphic/transformer bag) are included to help reduce dirt/grime on your graphic. We encourage use of the drop cloth, and the gloves can be substituted with a thorough hand-washing if desired.

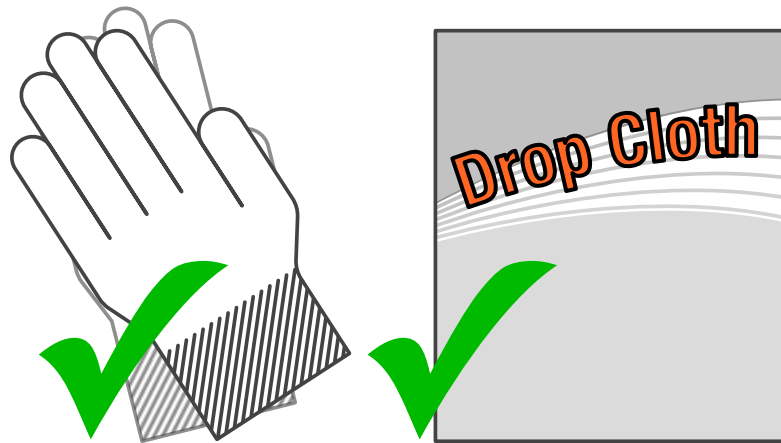


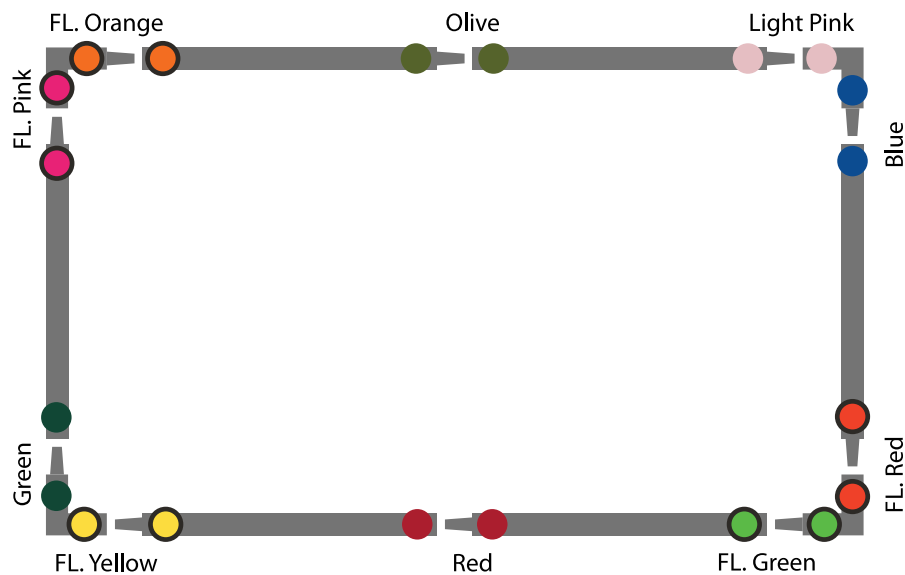

## Step 1. Layout frame components per drawing

- Match colored dots to each other. Frame is labeled for top and bottom, and all labelling is on the BACK SIDE of the frame.
- Tube sections are keyed to fit in one orientation. Colored dots should align with each other, and parts will snap in place with magnets.

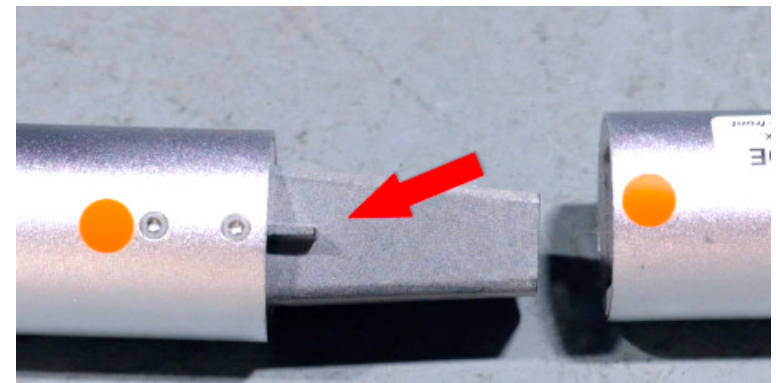


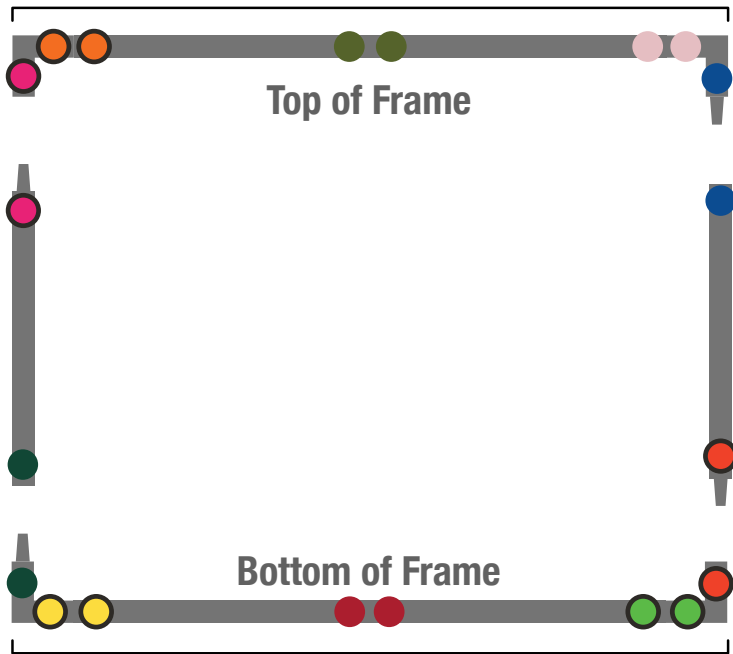


## Step 2. Assemble sides and tops/bottoms separately


- Attach corner pieces to the top and bottom, not the sides

## Step 3. Attach two sides to bottom of frame.

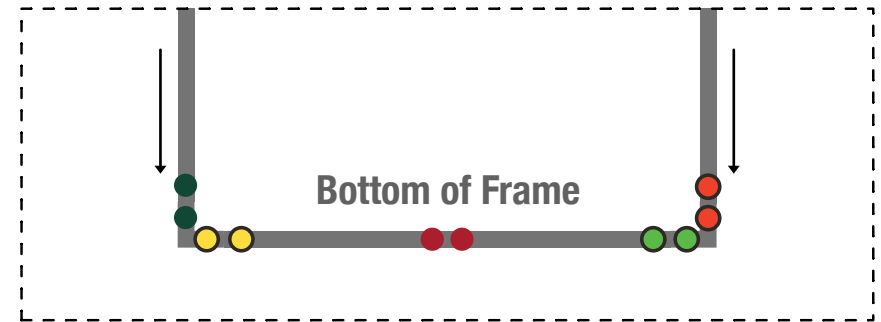

## Step 4. Attach top of frame.

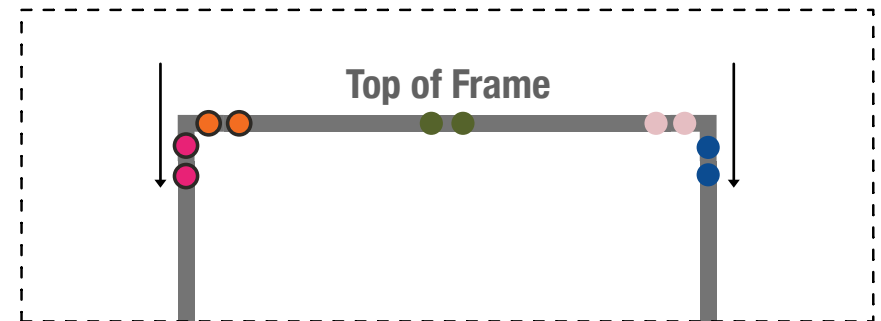

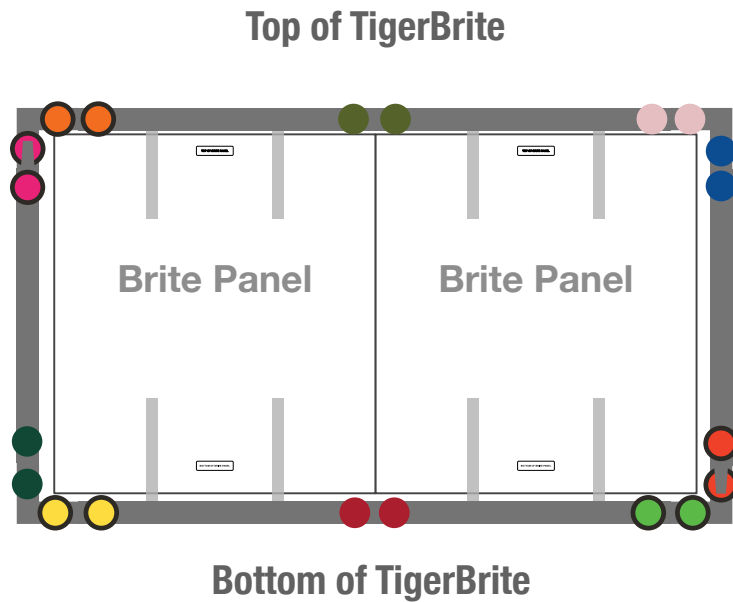

## Step 5. With the frame still lying down, unroll the Brite Panels with the lights toward the floor.

- Top of Brite Panels should align with top of frame, and bottom with bottom
- Both the frame and the lights are facing toward the floor


## Step 6. Velcro the Brite Panel to the frame using the straps and anchors

- Top of Brite Panel should be as close to the top of the frame as possible when strapped in.



## Step 7. Stand the frame up, allowing the lights to stretch as far down as they can. Re-cinch the bottom velcro straps for a snug fit if necessary.

- If you have two people, this can be done by having one person hold the frame up and the other adjusting the straps. Otherwise, temporarily install the feet.

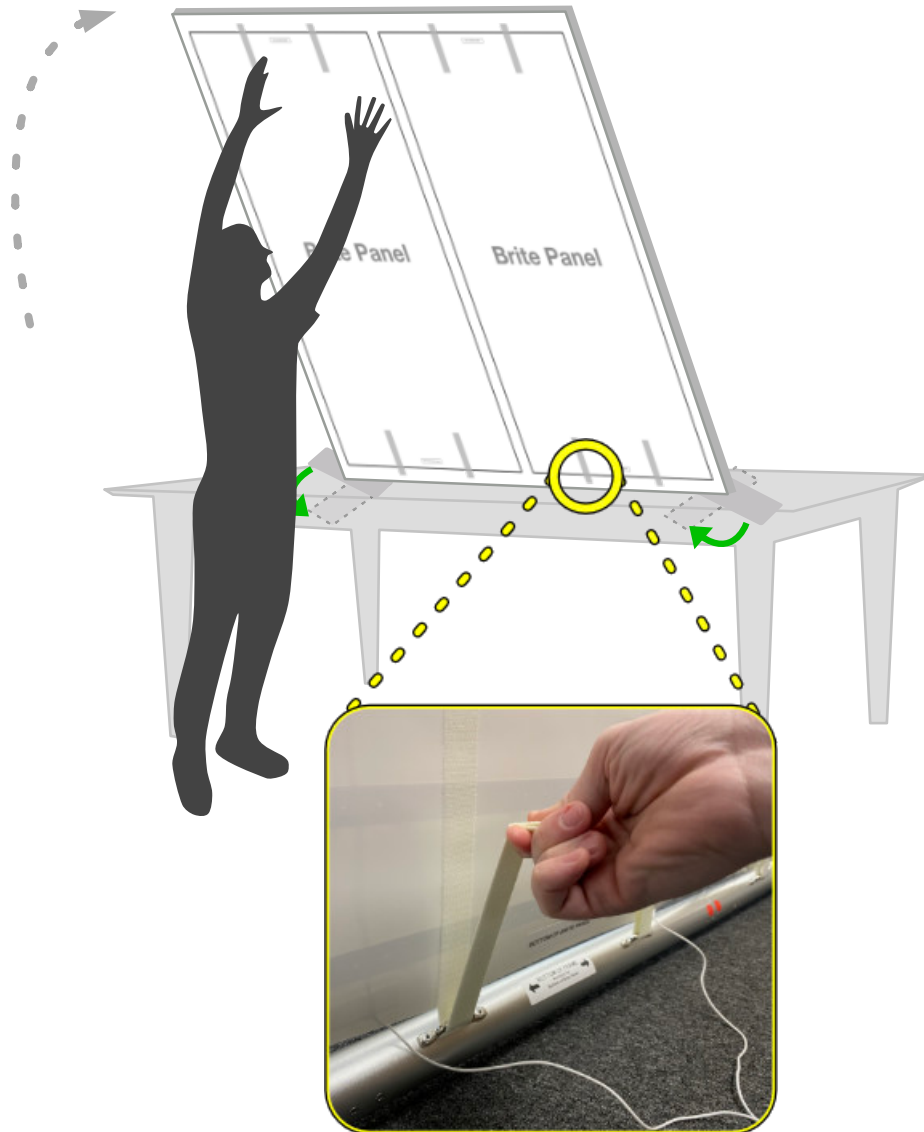

**Step 7. Stand the frame up, allowing the lights to stretch as far down as they can.**

**Re-cinch the bottom velcro straps for a snug fit.**


If you have two people, this can be done by having one person hold the frame up and the other adjusting the straps. Otherwise, temporarily install the feet.



**DO NOT PROCEED UNTIL YOU  
HAVE COMPLETED STEP 7:  
Re-Cinch Bottom Velcro Straps**

## Step 8. Lie the frame back down on the ground, and begin sliding the pillowcase graphic on.

- Start by ensuring the graphic is entirely over the corners of the frame.
- Then slowly pull the graphic down the frame. You may find it easier to bunch and then smooth the graphic down the frame.

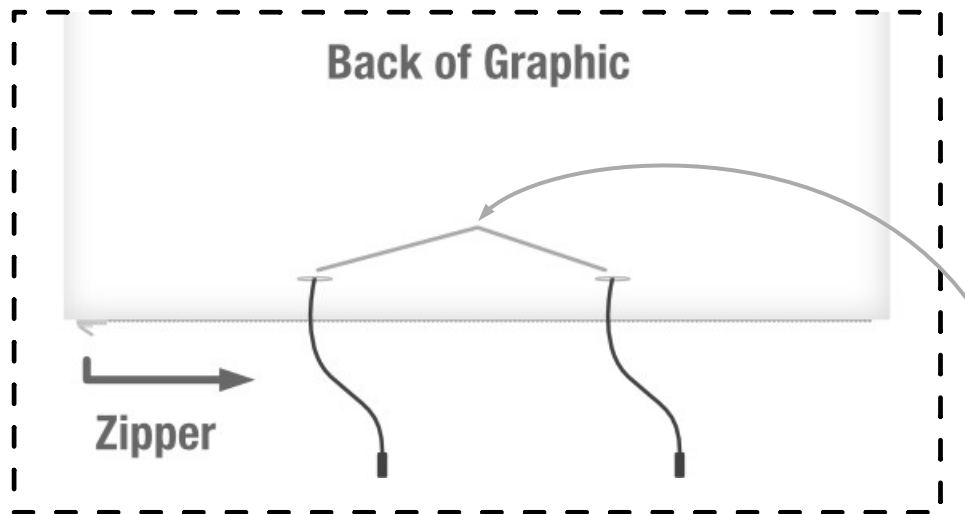


**Step 9. Feed the power cables from the Brite Panels through the wire management holes in the white fabric back of the graphic.**


**Step 10. Zipper bottom of graphic.**

**Step 11. Install feet by inserting the metal pegs into the holes visible at the bottom of the frame.**

- Shown here without the graphic.

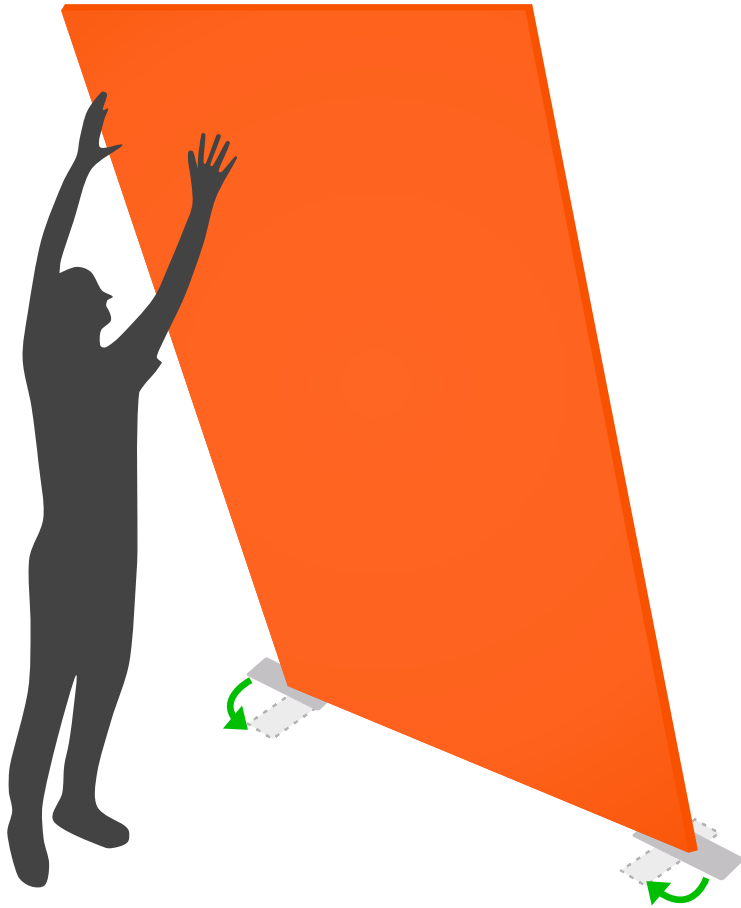


**Step 12. Stand the display up and rotate feet into position**

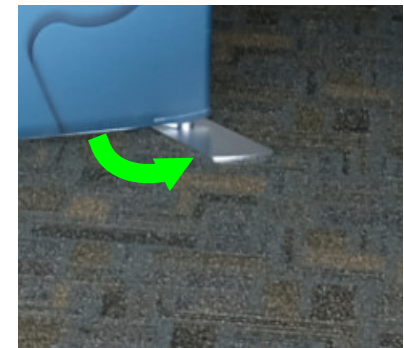





**Step 13. Plug in transformer and connect transformer cables pulled through the graphic in step 9.**

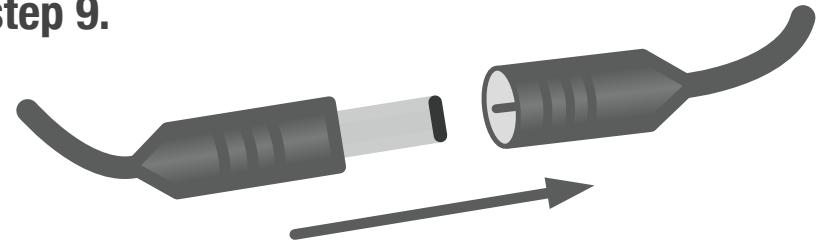

**NOTE: Transformer has a fan for cooling, which must be left open to prevent overheating. Refer to "THIS SIDE UP" sticker to ensure correct orientation.**

## Repacking:

For maximum product lifespan, we recommend always packing in the included padded bags (as seen below).

